

PLUG-IN PLATFORMS

CONNECTION CLAMPS



Connecting clamp for 2 plug-in feet (foot-foot connector)

For stepped and horizontal installation, the connection of adjacent pedestals provides greater stability.


for dimension	Art. no.:
45 x 45 mm	19000
60 x 60 mm	190001



Connecting clamp for 4 plug-in feet

for stepped and horizontal installation.

for dimension	Art. no.:
45 x 45 mm	190003
60 x 60 mm	190002

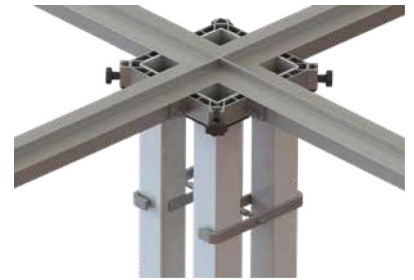

External plug-in foot clamp for 1 plug-in foot

In the case of stepped installation at different heights, it is not possible to connect the stage frames. The stage frame of the front stage is therefore connected to the plug-in foot (only on the outer section of the platform).

for dimension	Art. no.:
45 x 45 mm	19004
60 x 60 mm	190041



Internal plug-in foot clamp for 2 plug-in feet

for stepped installation on the inner platforms, the feet are firmly connected to the frame of the front platform with this clamp.

for dimension	Art. no.:
45 x 45 mm	19002
60 x 60 mm	190021



Coupling clamp for 1 plug-in foot

for connecting a stage frame with a plug-in foot for stepped installation, if a distance of 4 cm between the plug-in foot and the stage frame of the front stage is required.

for dimension	Art. no.:
45 x 45 mm	19001
60 x 60 mm	190011



Holder for 1 plug-in foot

to secure against slipping, when a platform is placed on another platform.


for dimension	Art. no.:
45 x 45 mm	19003
60 x 60 mm	190031
Load distributor Ø 80 mm	190032




Transport castor

for Praktikus platforms, on roller bearings, abrasion-resistant rubber, Ø 200 mm, without push handle.


dimension	Art. no.:
45 x 45 mm	18546
60 x 60 mm	185461

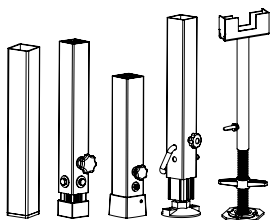


Plug-in feet page 22



Coverings page 44



Accessories page 46



Stairs/railings from page 52

ACCESSORIES

TRANSPORT CASTORS

Note:

Swivel castors with brake or with directional lock optionally available. Castor with polyurethane tread (Ø=160mm) also optionally available.

Transport castor

for Praktikus platforms, on roller bearings, unbraked, abrasion-resistant rubber, Ø 200 mm, without push handle.

Dimension	Art. no.:
45 x 45 mm	18545
60 x 60 mm	185451



Transport castor set for Praktikus platforms

Convert your Praktikus element into a transport trolley in no time. Equipped with 2 fixed and 2 swivel castors without brakes, abrasion-resistant rubber, Ø200 mm, roller bearings, with removable push handle, steel parts powder-coated in RAL 9005 deep black, suitable for platform width 100 cm

For corner bracket Art. no.:

Without brake		With brake	
45 x 45 mm	18544	45 x 45 mm	57431
60 x 60 mm	185441	60 x 60 mm	57432



Mobile base frame for stage platform

with 4 swivel castors with brake, steel parts powder-coated in RAL 9005 deep black, running surface made of polyurethane (Ø160mm) suitable for stage size 100x200 cm.

Art. no.:

for Unistage	18582
for Praktikus	18580



Drumriser 3x2m, 40 cm high

3x stage element Praktikus Light with 100 x 200 cm each, stage floor made of 12 mm thick screen printing plate in dark brown, 12x plug-in feet made of aluminum tube 45x45x2.5mm with swivel castors Ø 75mm, each with total brakes, load capacity per castor 75 kg (dynamic) and 150 kg (static), 4 x short quick connectors.

Art. no.: 11335



Scan the QR code now and watch the installation video



Roll riser

Ideal for upgrading plug-in foot platforms to a rolling platform up to a height of 40 cm. Higher assembly heights or loads possible on request. Suitable for platform type Praktikus 750 and Praktikus Light. Height to be added: 13.8 cm Swivel castor equipped with brake, powder-coated in RAL 9005 deep black (other RAL colors on request). Corner bracket design with stud bolt



	Foot mount 1-fold	Foot mount 2-fold	Foot mount 4-fold
45x45 mm	55176	55177	55178
60x60 mm	55179	55180	55181

