



“Praktikus 1000“ at a glance

Area (W x D)	100 x 200 cm
Weight	from approx. 34 kg
Usable area	2 m ²
Stacking height	9 cm
Traffic load	up to 1,000 kg/m ²


The even more resilient version

The Praktikus 1000 is the robust version of the series and ideal for mobile platforms that are used as audience stands. It complies with DIN EN 13814 and can be used both indoors and outdoors. Despite its high stability, it is easy to transport and assemble the elements thanks to their low weight. Triangular, trapezoidal or round elements can be integrated for an aesthetic and compact overall appearance. The Praktikus 1000 is therefore particularly suitable for events with high audience loads and offers maximum flexibility when designing the stage area.


- From 34 kg panel weight
- TÜV-tested up to 1,000 kg/m²
- Flexibility in shape, format and color
- Safety railing 100 kg/m
- Compatible with Justo scaffolding technology




You can find a variety of matching floor coverings on p. 44/45

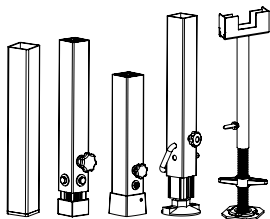


Plug-in feet page 22



Coverings page 44



Accessories page 46



Stairs/railings from page 52

PRAKTIKUS 1000



Rectangle

	Art. no.
100 x 200 cm	11006
100 x 150 cm	S
100 x 100 cm	11006a
50 x 200 cm	S
50 x 150 cm	S
60,70,80,90 x 100 cm	S
50 x 100 cm	S
60,70,80,90 x 200 cm	S
122 x 244 cm	S
100 x 300 cm	S



Triangle

100 x 100 x 141 cm	S
100 x 200 x 223.6 cm	S
100 x 51.8 x 100 cm	S



Trapezoid

100 x 100 x 100 x 200 cm	S
51.8x100x103.5x100 cm	S
103.5x100x155.3x100 cm	S

S = Special shape - available on request




A real eye-catcher: tanning studio on the Seine in Paris. The Praktikus 1000 stage element serves as the substructure.



Are you looking for a customized solution for your event?

We are happy to plan individual solutions for you using 3D programs for the perfect event. Our podiums are available in many special sizes and formats. You can also purchase numerous extras. To ensure that mobile stages can be used easily and safely, our range also includes, for example, suitable stairs, railings, facings, transport systems, etc.

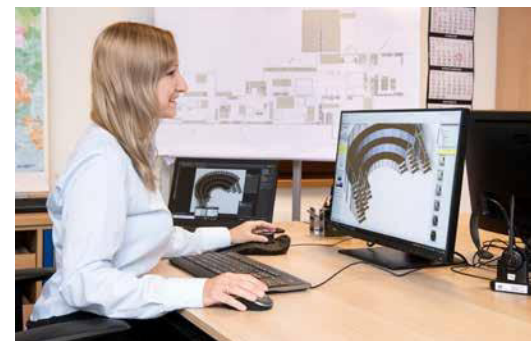

The internal corner brackets significantly increase the stability of the platform frame. They securely fix the plug-in feet and guarantee a stable stand for the platform elements.



Optional quick release for convenience and safety: simply pull up the lever to release, fold down to lock with double pressure. This makes assembly easier.



Simply slide the supplied X-connectors into the assembly groove to firmly connect the platform elements and create a perfectly level surface. Quick dismantling possible.



Additional quick connectors in the edge area stabilize the scenery surface. Use the practical plug-in foot clamps for steps and gradations (see p. 24).

